


POLYLIDS MODEL PL48R14 FLOATING SECTIONAL TANK COVERS WITH INSULATING CORE

INSULATED POLYLIDS CAN REDUCE HEAT LOSS OR PRODUCT EVAPORATION. EARLY PAYBACKS MAKE POLYLIDS AN EXCELLENT INVESTMENT THAT YOU CAN'T AFFORD TO BE WITHOUT.

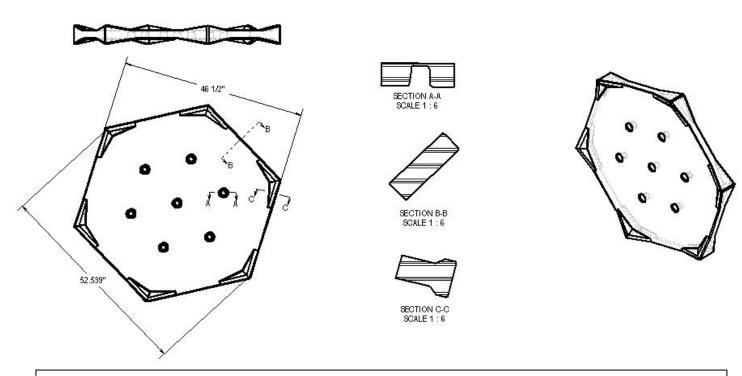

SPECIFICATIONS:

AREA PER SECTION: 12.7 sq. ft. (1.2 sq. m.)

WEIGHT: APPROX. 22 lbs. (10 Kg) THICKNESS: NOMINAL 2" (50mm)

SKIN: POLYETHYLENE, UV STABALIZED, NATURAL WHITE, RECYCLABLE **COLOURS:** COLOURS AVAILABLE, CONTACT FREE FORM PLASTICS

CORE: RIGID POLYURETHANE R14 (RSI2.4) ASTM C 177 INSULATION, 95% CLOSED CELL ASTM D-2856 **HIGHLIGHTS:** INTEGRAL KISS-OFFS ENSURE STRUCTURAL INTEGRITY & EDGE KNOCKERS PREVENT

SECTIONS FROM RIDING UP ON EACHOTHER AND ACT AS HANDLES

FREE FORM PLASTIC PRODUCTS ST. BRIEUX, SK, CANADA SOK 3V0 PHONE: (306) 275-2155 FAX: (306) 275-2101