
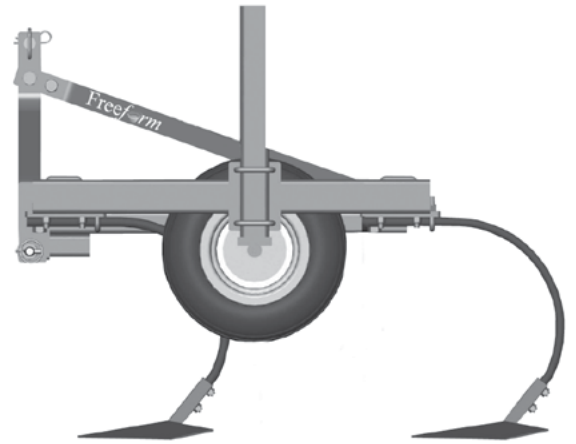


3-POINT HITCH CULTIVATOR

Versatile & Tough 3-Point Hitch Cultivator

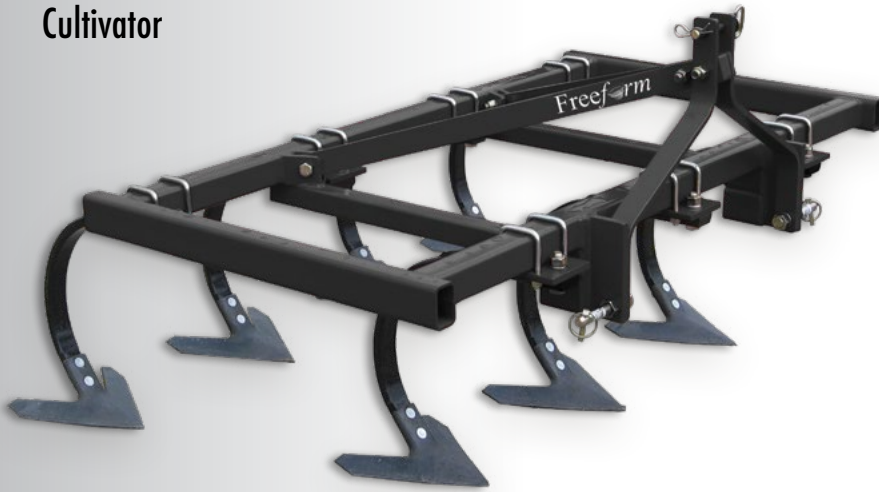

MODEL 1000 CULTIVATOR

- ▶ 5.25' (7 shanks) standard width, also available in 6.75' (9 shanks) and 8.25' (11 shanks)
- ▶ 9-inch shank spacing with $\frac{7}{8}$ " shanks.
- ▶ 2- $\frac{1}{2}$ " x 2- $\frac{1}{2}$ " x $\frac{3}{16}$ " wall frame.
- ▶ 3" x 2" x $\frac{3}{16}$ " cross members.
- ▶ Optional gauge wheels.
- ▶ Gauge wheel tires — 4.8" x 8", 4 ply.
- ▶ Category I three point hitch.
- ▶ 26- $\frac{1}{2}$ " between shank row beams.
- ▶ Uses 47° sweeps with $\frac{1}{2}$ " plow-bolts on 1- $\frac{3}{4}$ " centers.
- ▶ Solid shank mount.
- ▶ Can accept sweeps up to 11" wide.
- ▶ Under-frame clearance — 21- $\frac{1}{2}$ ".
- ▶ Maximum working depth is 8".
- ▶ Gauge wheels offer good depth control.
- ▶ Rated for tractors up to 65 HP.
- ▶ Approx. unit weights - 5.25' - 360 lb, 6.75' - 465 lb, 8.25' - 565 lb.
- ▶ Weight of gauge wheels — 60 lb.

3 Year Limited Warranty

5 Year Shank Breakage Warranty